

PSk2-15 CS-F32-60-2

Solar Surface Pump System

System Overview

Head	max. 80 m
Flow rate	max. 41 m³/h

Technical Data

Controller PSk2-15

- High efficiency solar pump controller
- Hybrid power (solar / grid / generator) support with LORENTZ SmartSolution
- Inputs for water meter, pressure sensors, digital switches
- Simple configuration with LORENTZ PumpScanner Android™ App
- Onboard data logging and system monitoring
- Inbuilt applications for constant pressure, constant flow and daily amount
- Integrated Sun Sensor
- Active temperature management
- Integrated MPPT (Maximum Power Point Tracking)

Power	max. 15 kW
Input voltage	max. 850 V
Optimum Vmp**	> 575 V
Motor current	max. 24 A
Efficiency	max. 98 %
Ambient temp.	-30...50 °C
Enclosure class	IP54

Motor AC DRIVE CS-F 11kW

- Highly efficient 3-phase AC motor
- Frequency: 25...51 Hz

Efficiency	max. 80 %
Motor speed	1,400...2,905 rpm
Power factor	0.87
Insulation class	F
Enclosure class	IPX4

Pump End PE CS-F32-60-2

- Premium materials
- Centrifugal pump

Efficiency	max. 75 %
------------	-----------

Pump Unit PUK2-15 CS-F32-60-2 (Motor, Pump End)

Water temperature	max. 70 °C****
Suction head	acc. to COMPASS sizing

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

****Special solutions available for >70 °C, please consult your distributor




PSk2-15 CS-F32-60-2


Solar Surface Pump System

Pump Chart

Vmp* > 575 V

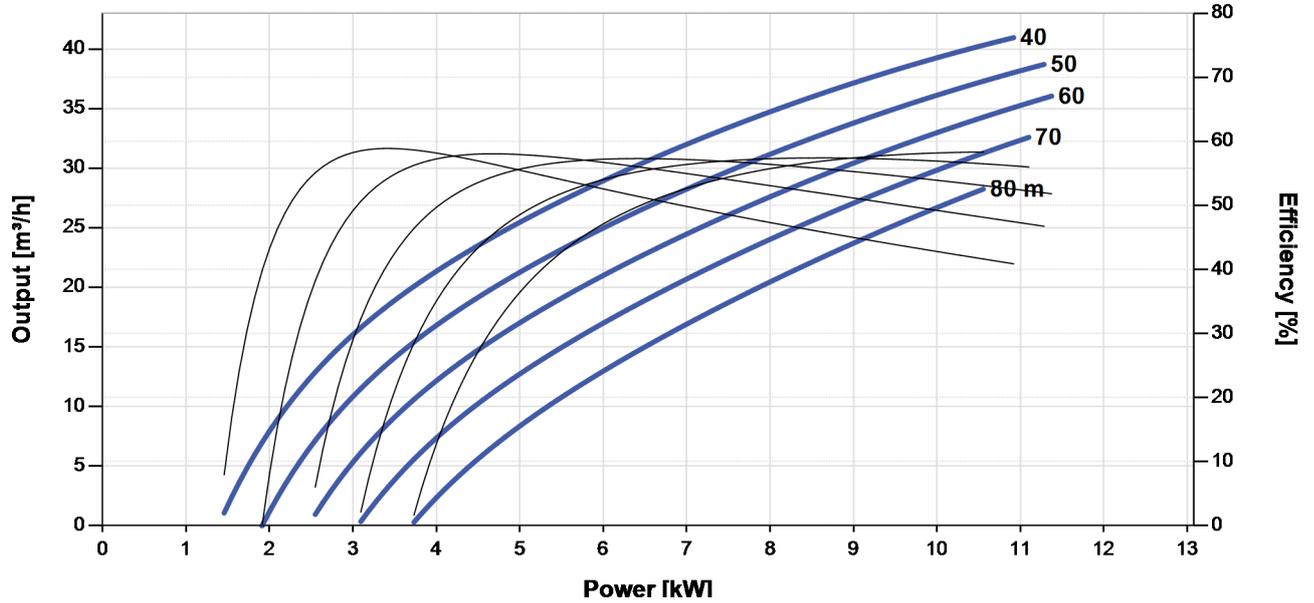

NPSH

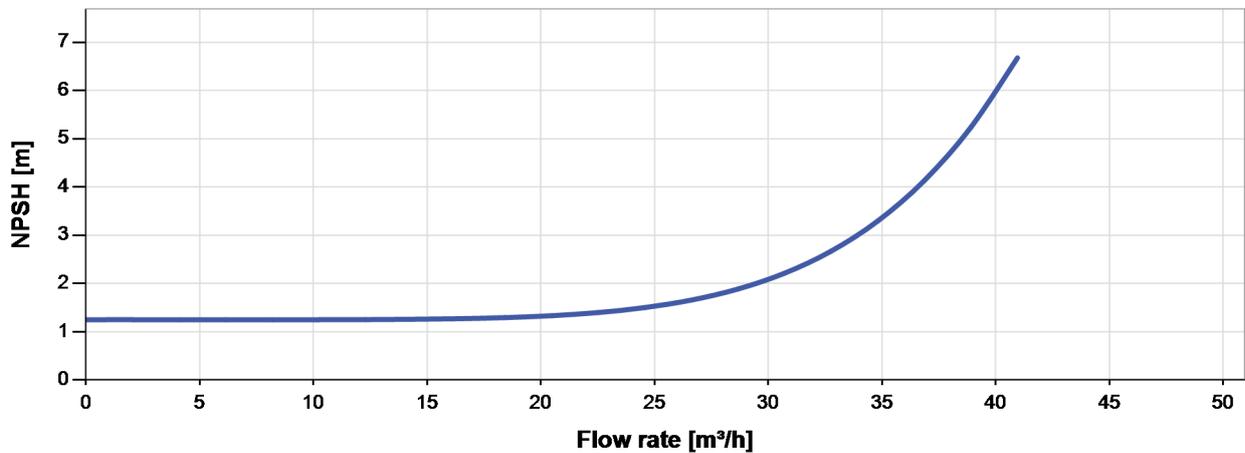

The NPSH (Net Positive Suction Head) is NOT the operating suction head. To calculate the operating suction head please refer to the installation manual.

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature




PSk2-15 CS-F32-60-2

Solar Surface Pump System

Dimensions and Weights


Controller

H = 500 mm
 H1 = 450 mm
 H2 = 421 mm
 W1 = 320 mm
 W2 = 290 mm
 D = 9.0 mm
 D1 = 226 mm

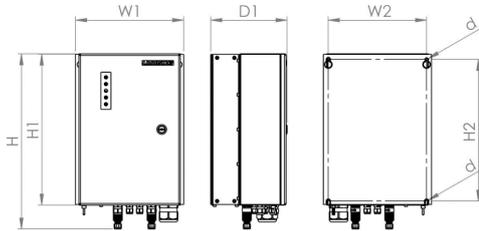

Pump Unit

A = 330 mm
 B = 255 mm
 C = 490 mm
 D = 320 mm
 E = 225 mm
 F = 170 mm
 G = 105 mm
 H = 960 mm
 I = G1/2"
 J = 298 mm
 K = 240 mm
 L = 74 mm
 M = 145 mm
 N = 18 mm
 O = 30 mm
 P = 14 mm

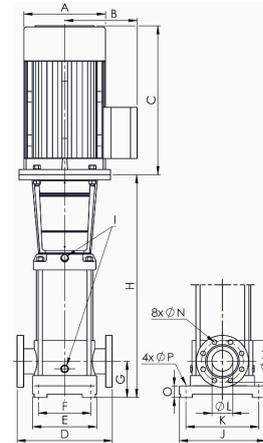

	Net weight
Controller	18 kg
Pump Unit	185 kg
Motor	107 kg
Pump End	78 kg

