

PSk2-40 C-SJ120-3

Solar Submersible Pump System for 10" wells

System Overview

Head max. 55 m
Flow rate max. 241 m³/h

Technical Data

Controller PSk2-40

- High efficiency solar pump controller
- Hybrid power (solar / grid / generator) support with LORENTZ SmartSolution
- Inputs for water meter, pressure sensors, digital switches
- Simple configuration with LORENTZ PumpScanner Android™ App
- Onboard data logging and system monitoring
- Inbuilt applications for constant pressure, constant flow and daily amount
- Integrated Sun Sensor
- Active temperature management
- Integrated MPPT (Maximum Power Point Tracking)

Power max. 37 kW
Input voltage max. 850 V
Optimum Vmp** > 575 V
Motor current max. 65 A
Efficiency max. 98 %
Ambient temp. -30...50 °C
Enclosure class IP54

Motor AC DRIVE SUB 6" 30kW

- Highly efficient 3-phase AC motor
- Frequency: 25...53 Hz
- Premium materials, stainless steel: AISI 304
- No electronics in the motor

Efficiency max. 84 %
Motor speed 1,400...3,020 rpm
Power factor 0.88
Insulation class F
Enclosure class IP68
Submersion max. 150 m

Pump End PE C-SJ120-3

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Centrifugal pump

Efficiency max. 75 %

Pump Unit PUK2-40 C-SJ120-3 (Motor, Pump End)

Borehole diameter min. 9,8 in
Water temperature max. 30 °C****

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

****Special solutions available for >30 °C, please consult your distributor




PSk2-40 C-SJ120-3

Solar Submersible Pump System for 10" wells

Pump Chart


Vmp* > 575 V

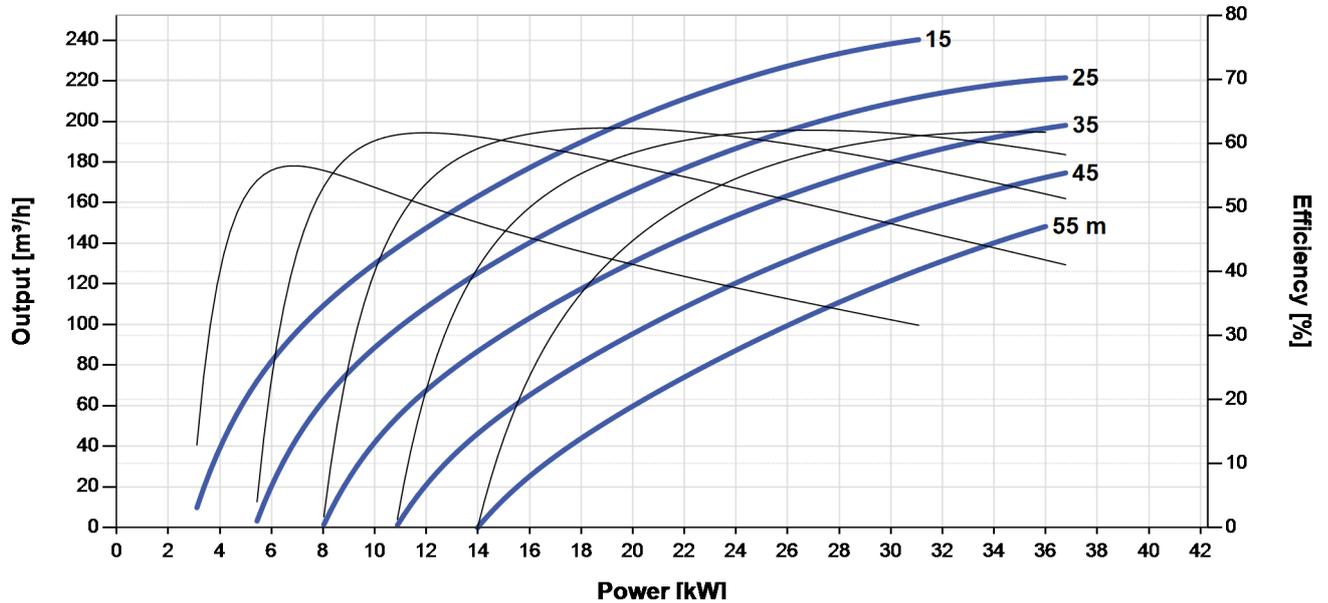

Dimensions and Weights


Controller

H = 500 mm
 H1 = 450 mm
 H2 = 421 mm
 W1 = 320 mm
 W2 = 290 mm
 D = 9.0 mm
 D1 = 226 mm

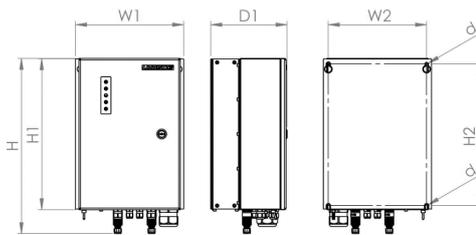

Pump Unit

A = 1,971 mm
 B = 1,120 mm
 C = 851 mm
 D = 143 mm
 E = 230 mm
 S = 6 in

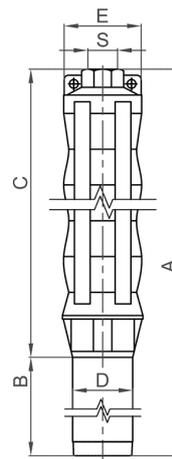

	Net weight
Controller	18 kg
Pump Unit	132 kg
Motor	90 kg
Pump End	42 kg

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

