

PSk2-9 C-SJ17-11

Solar Submersible Pump System for 6" wells

System Overview

Head	max. 90 m
Flow rate	max. 25 m³/h

Technical Data

Controller PSk2-9

- High efficiency solar pump controller
- Hybrid power (solar / grid / generator) support with LORENTZ SmartSolution
- Inputs for water meter, pressure sensors, digital switches
- Simple configuration with LORENTZ PumpScanner Android™ App
- Onboard data logging and system monitoring
- Inbuilt applications for constant pressure, constant flow and daily amount
- Integrated Sun Sensor
- Active temperature management
- Integrated MPPT (Maximum Power Point Tracking)

Power	max. 10 kW
Input voltage	max. 850 V
Optimum Vmp**	> 575 V
Motor current	max. 17 A
Efficiency	max. 98 %
Ambient temp.	-30...50 °C
Enclosure class	IP54

Motor AC DRIVE SUB 6" 7.5kW

- Highly efficient 3-phase AC motor
- Frequency: 25...54 Hz
- Premium materials, stainless steel: AISI 304
- No electronics in the motor

Efficiency	max. 80 %
Motor speed	1,400...3,080 rpm
Power factor	0.87
Insulation class	F
Enclosure class	IP68
Submersion	max. 150 m

Pump End PE C-SJ17-11

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Centrifugal pump

Efficiency	max. 73 %
------------	-----------

Pump Unit PUK2-9 C-SJ17-11 (Motor, Pump End)

Borehole diameter	min. 6,0 in
Water temperature	max. 30 °C****

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

****Special solutions available for >30 °C, please consult your distributor




PSk2-9 C-SJ17-11

Solar Submersible Pump System for 6" wells

Pump Chart


Vmp* > 575 V

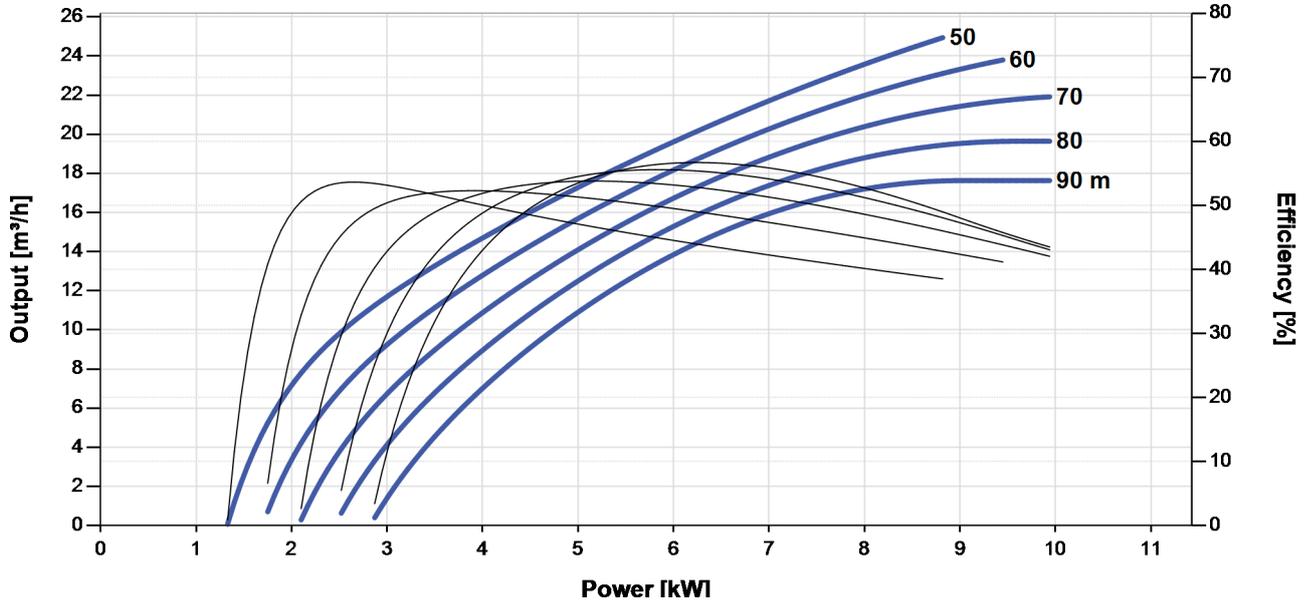

Dimensions and Weights


Controller

- H = 500 mm
- H1 = 450 mm
- H2 = 421 mm
- W1 = 320 mm
- W2 = 290 mm
- D = 9.0 mm
- D1 = 226 mm

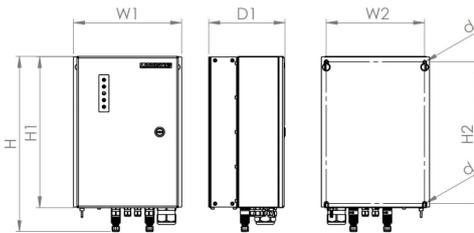

Pump Unit

- A = 1,568 mm
- B = 645 mm
- C = 923 mm
- D = 144 mm
- E = 133 mm
- S = 2.5 in

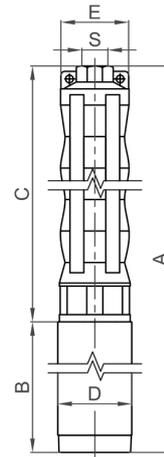

	Net weight
Controller	18 kg
Pump Unit	72 kg
Motor	51 kg
Pump End	21 kg

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

